

Factory wholesale

Jiaxing Green Shield New Materials Co., Ltd


WEB: www.gstarp.com

Oil fence fabiric – Factory wholesale




Professional sales team, over 15 years experience in producing PVC Greenhouse Fabric, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpulin in Haining, The greatest feature of our Tarp for PVC Greenhouse Fabric is stable and durable quality.











Oil fence fabiric – Factory wholesale



Flexible vinyl duct is manufactured by the process of scraping and coating, this material has high anti-static requirements, our antistatic grade can reach 10E6. In the production process, antimony trioxide fire retardant material, fire rating up to EU and US standards. The material is characterized by wear-resistant, long life cycle, flexible, lightweight, waterproof, strong environmental adaptability, etc., which is common in mines, industrial mining, tunnels, airports, household kitchens and so on.



UV risistant:

The GSTRP PVC tarps are all UV-protected, which is a very important feature for it, by taking into account the surface and coating, it consists of a 6-layer barrier against UV rays.

Airtightness:

Our coated cloth is equipment imported from Germany, the new advanced process to make the coating and the basic tightly combined, through the oven and tunnel furnace heating and shaping, has a very good airtightness, windproof effect, with good airtightness, it can be used as a large odd storage device.

Heat insulation:

The PVC coated fabic is formulated so that the coating is flame retardant, an extra layer of security is added to protect against subultraviolet rays, and has good insulation against heat sources.

Durability:

The PVC coated fabric is produced by imported equipment, the product structure is advanced, has a solid surface, has a strong resistance to prevent tear, this is one of the biggest features of our products, the quality is very stable, with long life cycle, there is a very excellent durability.

You can get the reasonable price with best quality here.





The Benefits of Using Flexible Vinyl Ducts in HVAC Systems

- The application of Flexible Vinyl Duct in HVAC system has the following advantages
- Flexible Vinyl Duct has good UV and corrosion resistance, 100% waterproof, and can be used in a variety of environments without corrosion.
- High strength and wear resistance, durability can resist inflation for a long-term stable use.
- It is suitable for all kinds of bridges, mines and tunnels, greatly reducing the cost.

- III Choosing the Right Fabric for High-Speed Doors
- Here are a few factors to consider when choosing a High Speed Door Fabric:
- High quality PVC fabric has strong impact resistance, weather resistance, UV resistance, wear resistance, tear resistance, and high strength, and can cope with the wear caused by frequent use, with good durability. It can also be used normally in direct sunlight.
- PVC fabric is 100% waterproof and can be used in wet and rain environments to prevent moisture penetration and block humid air.
- The use temperature range of PVC fabric is cold-hot 40-70° C, which ensures that the High Speed Door can be used normally in high temperature or extremely cold environment.
- ▶ High Speed Door fabric has good flexibility, can be used at high frequency, with fast opening and closing as well as high work efficiency.

Oil fence fabiric -specification



			340gsm	550gsm	610gsm	650gsm	750gsm	1050gsm
Properties	Units	Test method	Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*840D	1000D*1000D	500D*840D	1000D*1000D	1000D*1000D Panama	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	30*19	18*18	30*19	20*20	30*30	30*30 Panama
Finished Fabric Weight	Gram/m2	DIN53352	340	550	340	650	750	1050
Base Fabric Weight	Gram/m2	DIN53352	135	157	135	175	265	265
Thickness-finished product	um	DIN53352	32	42	32	52	65	80
Break Strength Warp	N/5cm	GB/T1040	2100	2000	2100	2500	4000	4200
Break Strength Weft	N/5cm	GB/T1040	2200	1800	2200	2200	3800	4000
Tear Strength Warp	N/5cm	DIN 53363	150	220	150	280	800	600
Tear Strength Weft	N/5cm	DIN 53363	200	200	200	250	700	550
Adhension	N/5cm	DIN 53357	100	120	100	90	120	120
Temperature range	°C	DIN 53368	-30~+70	_30~+70	-30~+70	_30~+70	_30~+70	_30~+70
Fire Retardant		Self– extinguishing	M1		M1		ONE SIDE COATED	Both sides lacquring










Jiaxing Green Shield New Materials Co., Ltd

Oil fence fabiric – Factory wholesale



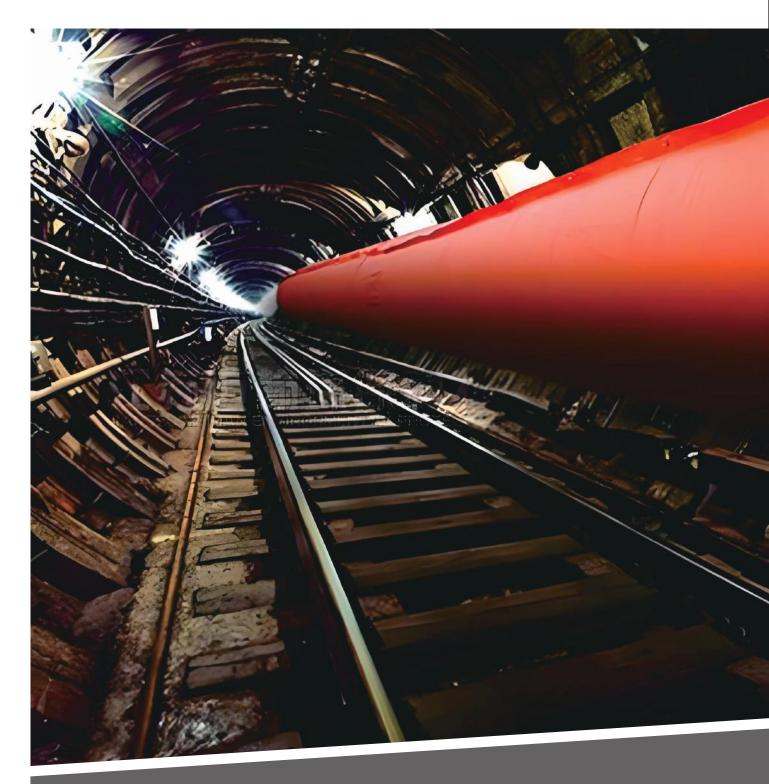

Jiaxing Green Shield New Materials Co., Ltd Mobile: 0086 13625863196 WhatsApp: 0086 13625863196 Add : No.365 West Qianjiang Road, Haining, Zhejiang, China e-mail : bill@gstarp.com