


House divide screen – Factory wholesale

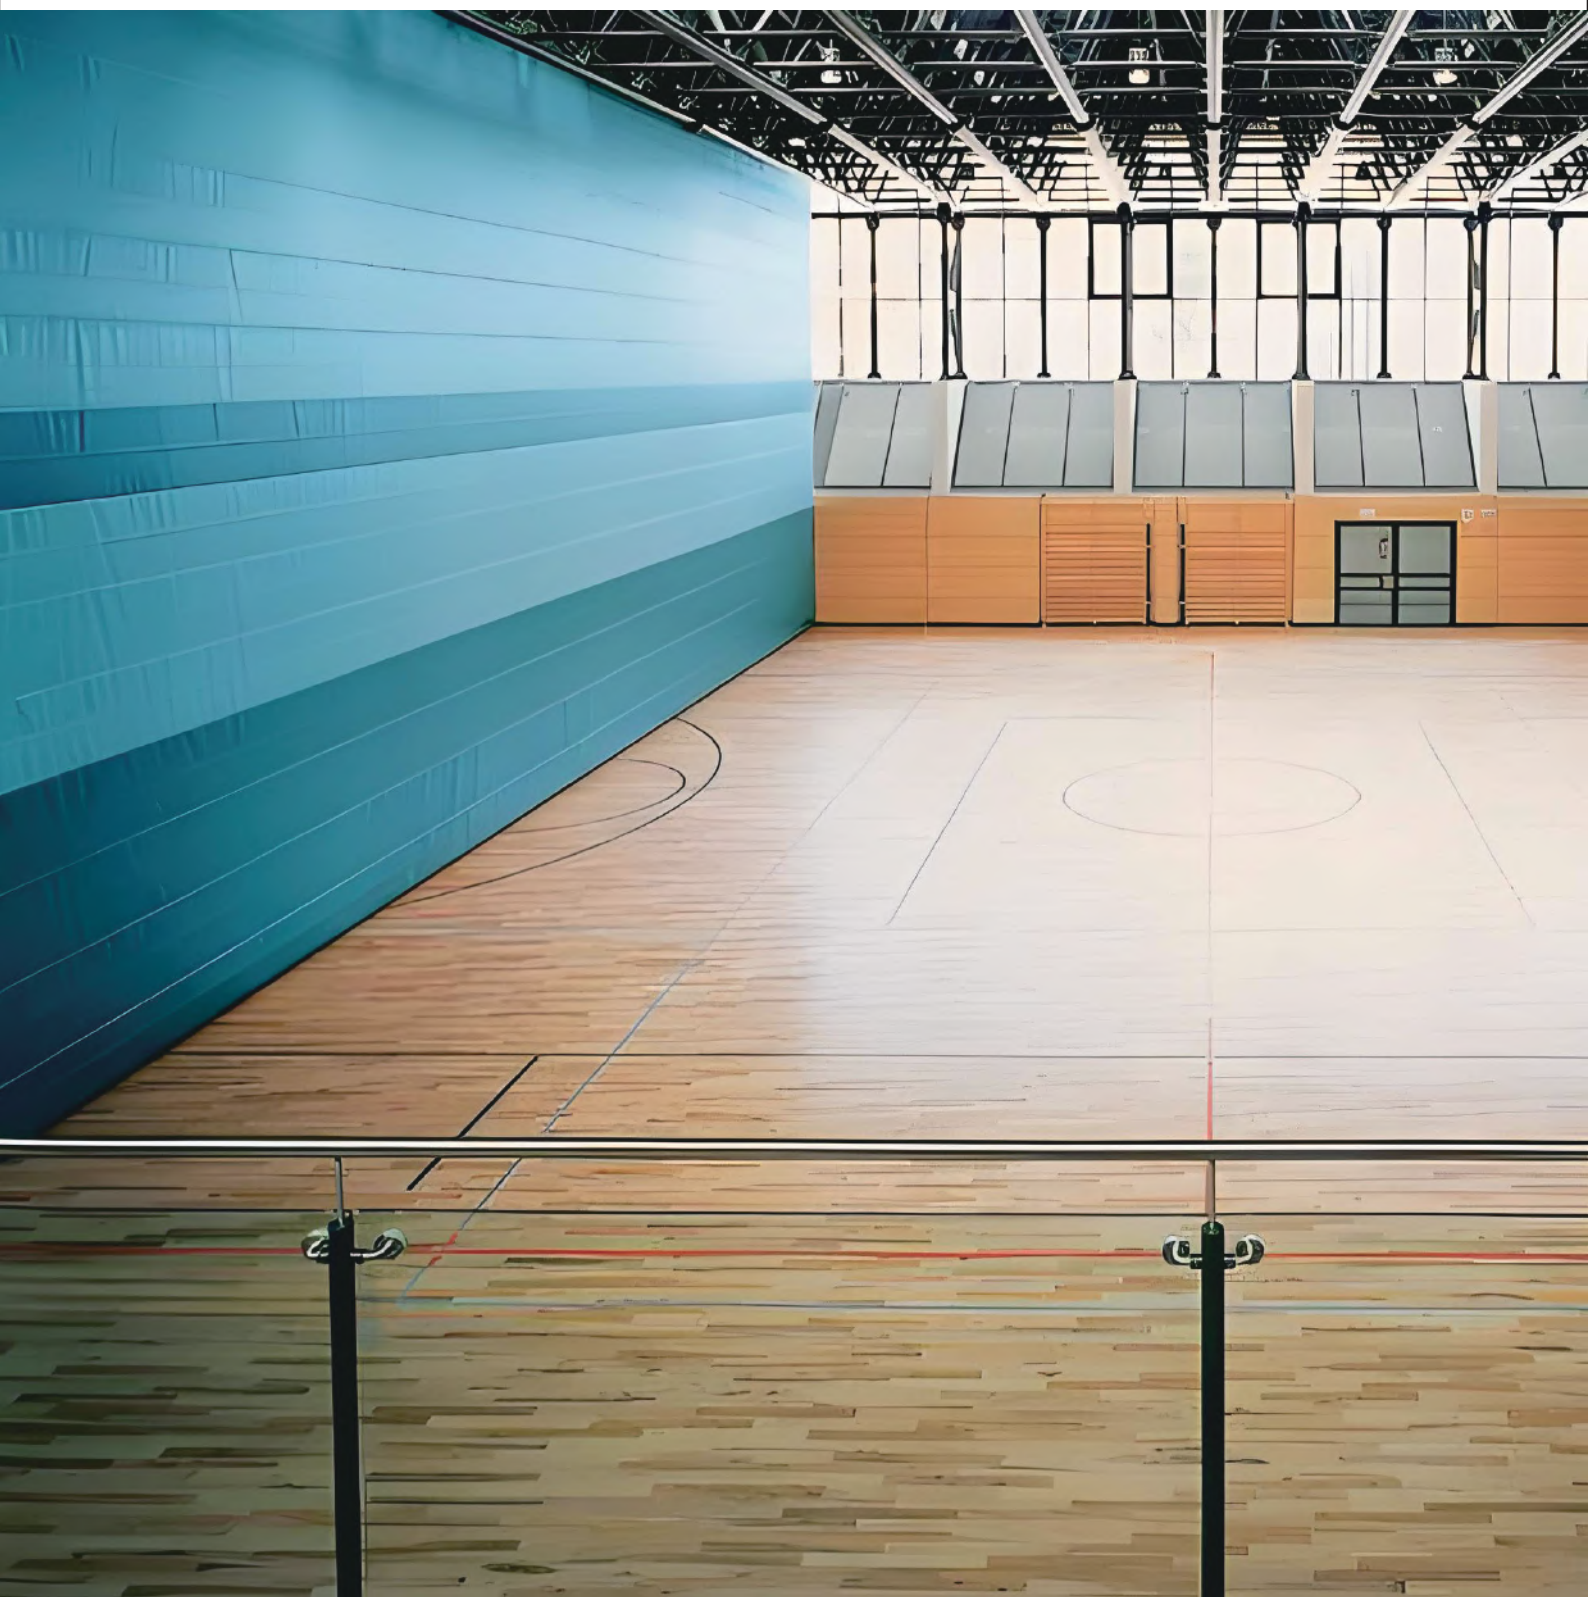

Quick Space Divider – Maximizing Space & Adding Flair to Business

WEB: [www.gstarp.com](http://www.gstarp.com)


Jiaying Green Shield New Materials Co., Ltd



This flexible PVC house divider screen tarpaulin is widely used in stadiums, supermarkets, factories, hospitals, and indoor spaces. It offers a quick and flexible way to create independent spaces, isolating noise and light, and providing effective spatial solutions.

### Properties of House divide screen:

- ▶ Fire retardent / heat insulation
- ▶ Colour fastness
- ▶ Smooth surface
- ▶ 100%waterproof
- ▶ Folding resistant
- ▶ No phthalic acid
- ▶ Puncture resistant
- ▶ Alcohol resistance





Welcome to  
**OURFACTORY**

Professional sales team, over 15 years experience in producing PVC water pipe material, Over 10 years OEM&ODM finished product experience, we are a factory producing PVC tarpulin in Haining. The greatest feature of our Tarp for PVC water pipe material is stable and durable quality.



You can get the reasonable price with best quality here.

## House divide screen – Factory wholesale

### Odorless:

The PVC is made of high purity PVC raw materials, all auxiliary materials are also environmentally friendly, as a professional PVC production and manufacturing plant, the product has no odor at all. And with anti-mold function, there is no odor during the use.

### Self-cleaning:

surface treatment, acrylic or PVDF, the surface is very smooth, dust or other dirt is difficult to adhere to it, with good self-cleaning.

### Easy to clean:

fabric is very soft, smooth surface, chemically stable and very easy to clean. It can be cleaned with warm or cold water.




### Environmental Protection:

GSTARP follow the EU environmental standards and the U.S. HSF standards, all raw materials and auxiliary materials are strictly in accordance with the requirements of the test, our equipment is very advanced, to ensure that the entire production process is very environmentally friendly, our products are exported to more than 100 countries in the world, very environmentally friendly.

## House divide screen – Specifications



Properties	Units	Test method	320gsm	410gsm	450gsm	750gsm
			Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*500D	1000D*1000D	500D*500D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	9*9	18*18	18*16	23*23
Finished Fabric Weight	Gram/m2	DIN53352	320	580	580	750
Base Fabric Weight	Gram/m2	DIN53352	45	95	95	200
Thickness–finished product	um	DIN53352	31	54	54	60
Break Strength Warp	N/5cm	GB/T1040	800	1500	1500	3000
Break Strength Weft	N/5cm	GB/T1040	750	1200	1200	2800
Tear Strength Warp	N/5cm	DIN 53363	150	250	250	300
Tear Strength Weft	N/5cm	DIN 53363	120	200	200	270
Adhesion	N/5cm	DIN 53357	30	50	50	120
Temperature range	℃	DIN 53368	-30~+70	-40~+70	-30~+70	-30~+70
Fire Retardant		Self-extinguishing				both sides lacquering

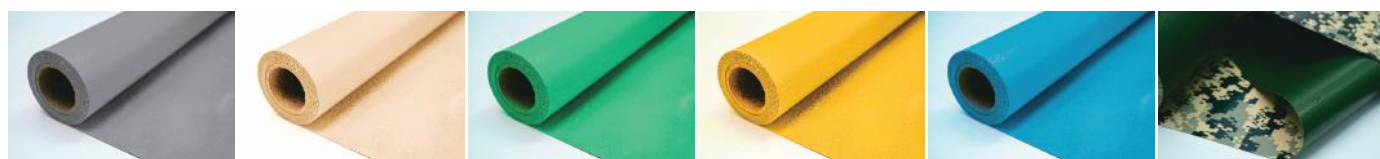

### Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com