

Inflatable boat tarpaulin – Factory wholesale



GSTARP



Wight: 780gsm 850gsm 1050gsm 900gsm

Customization is also possible



GSTARP

Inflatable boat tarpaulin – Factory wholesale

An ideal choice for leisure activities and life-saving, suitable for extremely harsh environments. It is the primary material choice for dinghies, inflatable boats, banana boats, rafts, lifeboats, and speedboats.

Inflatable boat tarpaulin adopts high strength environmental protection PVC material, with excellent waterproof, UV resistance and wear resistance, which can adapt to a variety of water environment. It is lightweight and durable, strong tear resistance, ensure the use of safety. Easy to clean and maintain, it is the ideal choice for water sports recreation, which is stable and reliable.

Professional sales team, over 15 years experience in producing Inflatable boat tarpaulin, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpaulin in Haining, The greatest feature of our Inflatable boat tarpaulin is stable and durable quality.



Welcome to
OURFACTORY





GSTARP

Inflatable boat tarpaulin – Factory wholesale

Choosing the Right Tarpaulin for Your Inflatable Boat

Safety first

1 Choosing the right tarpaulin for your inflatable boat is crucial for ensuring safety and comfort. It also affects the boat's durability and practicality.

2 The Inflatable Boat Tarpaulin is made from high-strength materials, offering superior tear resistance and abrasion resistance, effectively preventing damage from external factors like branches and rocks in the water or along the shore. A high-quality Inflatable Boat Tarpaulin is 100% waterproof, ensuring long-term safe use without leakage.

Durability:

3 The Inflatable Boat Tarpaulin is UV-resistant, preventing aging and ensuring a long service life.

Temperature Adaptability:

4 It can withstand temperatures as low as -40° C and as high as 80° C, making it suitable for use in any temperature environment.

5 Lightweight Inflatable Boat Tarpaulin, typically around 650g, is easy to carry, making it ideal for short-term use and recreational activities. It is an economical choice.

6 For medium-sized boats, a 750-1050g Inflatable Boat Tarpaulin provides excellent protection and durability, with good load-bearing capacity and resistance to rapid currents.

7 Heavy-duty Inflatable Boat Tarpaulin, generally over 1250g, is designed for professional rescue operations and can withstand extreme conditions.

8 The Inflatable Boat Tarpaulin also offers excellent acid and corrosion resistance, making it suitable for use in marine environments.

9 The tarpaulin can be tailored to customer requirements, with options for custom colors, logos, and anti-slip textures to meet specific needs.

In summary, you can choose the appropriate Inflatable Boat Tarpaulin based on material properties and usage scenarios.

| Items | polyester fabric | weight(g/sqm) |
|----------|--------------------------|---------------|
| GLT1101 | 1000D*1000D 30*30 | 750 |
| GCT2201 | 1000D*1000D 30*30 | 1050 |
| GCT2202 | 1000D*1000D 30*30 | 900 |
| GCT2203 | 1000D*1000D 23*23 | 850 |
| GCT2204 | 1000D*1000D 23*23 | 750 |
| GKCT3301 | 1500D*1500D 30*30 Panama | 1350 |
| GKCT3302 | 1500D*1500D 30*30 Panama | 1250 |
| GKCT3303 | 1000D*1000D 30*30 Panama | 1050 |
| GKCT3304 | 1000D*1000D 23*23 | 850 |




GSTARP

Inflatable boat tarpaulin – Specifications

| Properties | Units | Test method | 750gsm | 850gsm | 900gsm | 1050gsm | 1250gsm |
|----------------------------|-------------|--------------------|-----------------------|---------------|---------------|-----------------------|---------------|
| | | | Average value | Average value | Average value | Average value | Average value |
| Base Thread Density | Denier | DIN53350 | 1000D*1000D | 500D*500D | 1000D*1000D | 1000D*1000D | 1500D*1500D |
| Base Fabric Density | Thread/inch | DIN53351 | 23*23 | 18*17 | 28*26 | 30*30 Panama | 30*30 Panama |
| Finished Fabric Weight | Gram/m2 | DIN53352 | 750 | 850 | 900 | 1050 | 1250 |
| Base Fabric Weight | Gram/m2 | DIN53352 | 200 | 75 | 236 | 265 | 380 |
| Thickness–finished product | um | DIN53352 | 60 | 65 | 72 | 80 | 100 |
| Break Strength Warp | N/5cm | GB/T1040 | 3000 | 1250 | 3500 | 4200 | 7000 |
| Break Strength Weft | N/5cm | GB/T1040 | 2800 | 1150 | 3300 | 4000 | 6800 |
| Tear Strength Warp | N/5cm | DIN 53363 | 300 | 150 | 500 | 600 | 1000 |
| Tear Strength Weft | N/5cm | DIN 53363 | 270 | 125 | 450 | 550 | 900 |
| Adhesion | N/5cm | DIN 53357 | 120 | 100 | 120 | 120 | 120 |
| Temperature range | °C | DIN 53368 | -30~+70 | -30~+70 | -30~+70 | -30~+70 | -30~+70 |
| Fire Retardant | | Self-extinguishing | both sides lacquering | | Top side | both sides lacquering | |

Colour: Any color

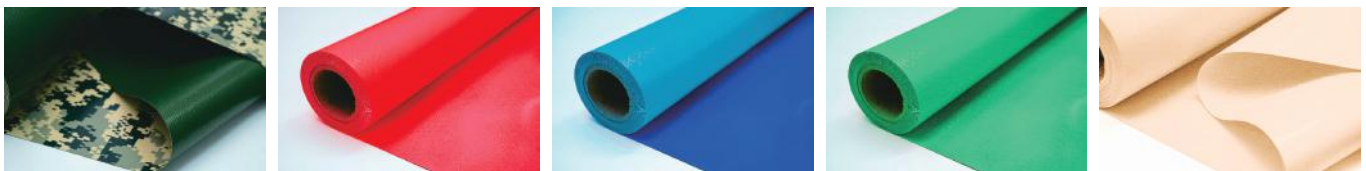

Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com