

PVC bottom fabric – Factory wholesale



Hot sale > 610gsm > 650gsm > 750gsm

Customization is also possible
TPU Materials are also popular


PVC bottom fabric – Factory wholesale



Professional sales team, over 15 years experience in producing PVC bottom fabric, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpulin in Haining, The greatest feature of our PVC bottom fabric is stable and durable quality.




Welcome to
OURFACTORY

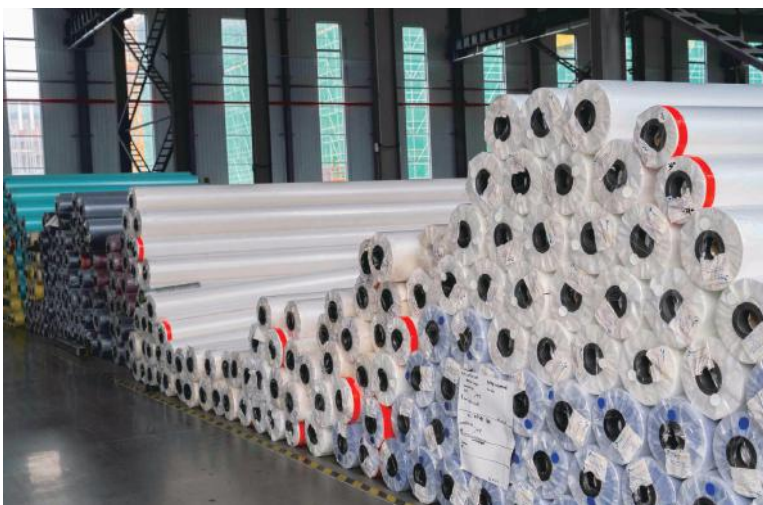

PVC bottom fabric – Factory wholesale



PVC bottom fabric makes the construction of the swimming pool relatively simple, with 100% waterproof function, prevent water from seeping into the ground, reduce the construction cost, shorten the construction time, and PVC bottom fabric has a good flexibility, the appearance and color are customized.

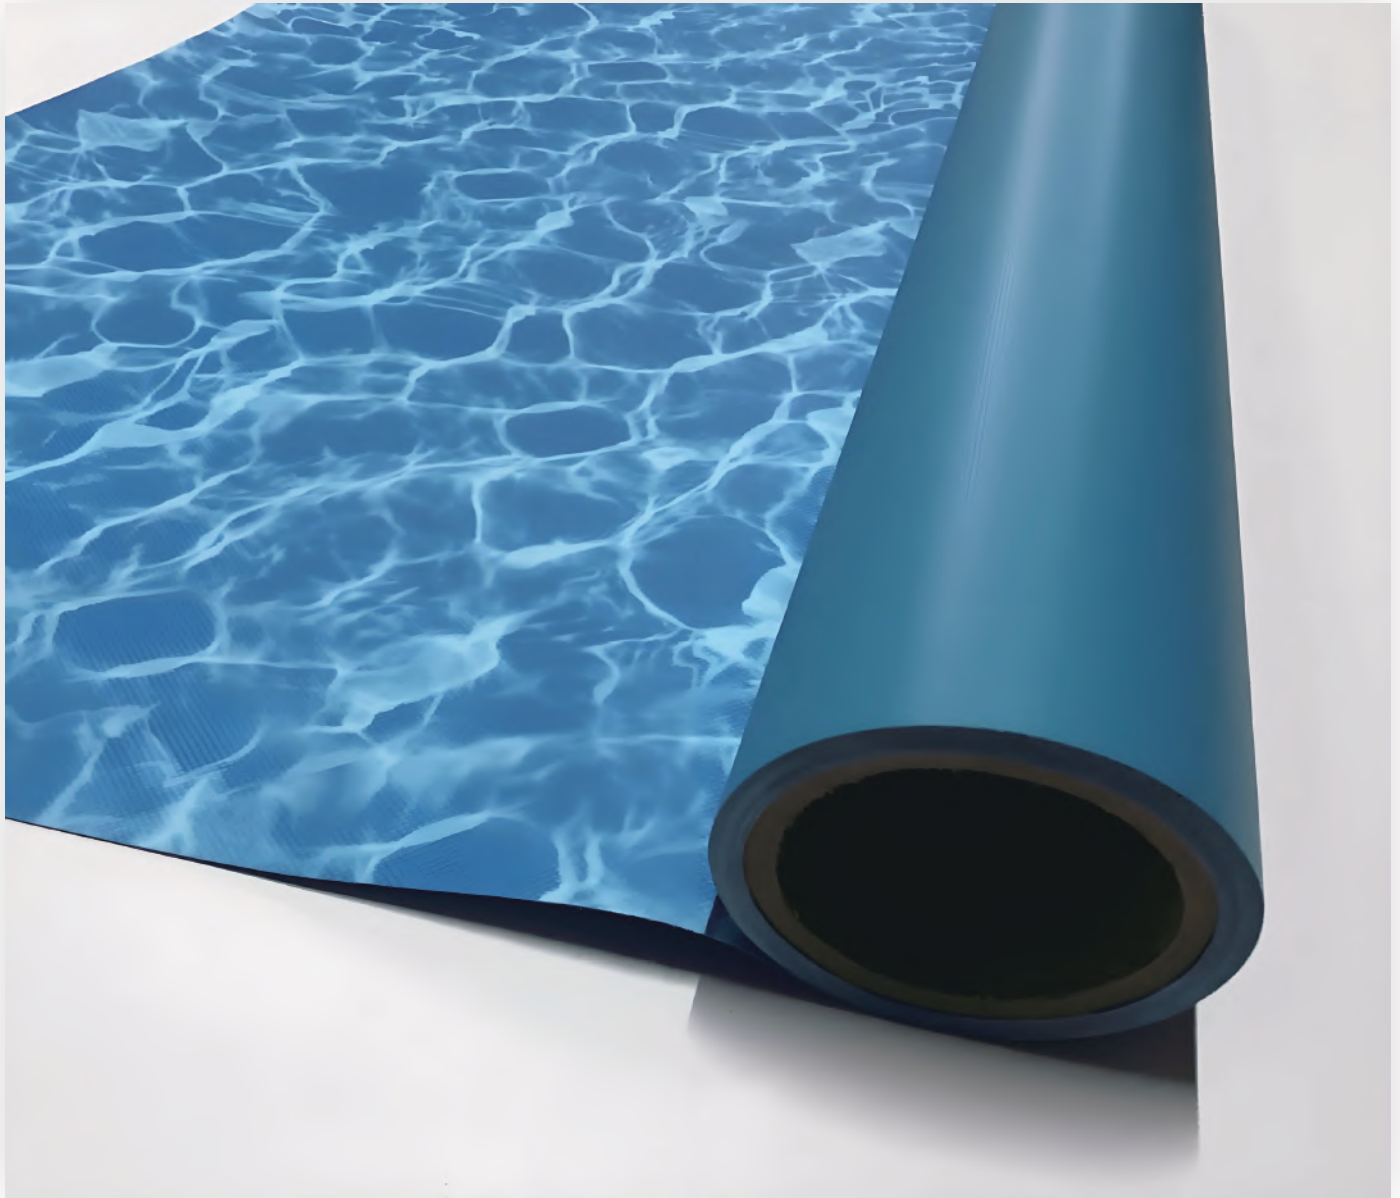

You can get the reasonable price with best quality here!



Super Tear Resistance

GSTRP uses the high mesh density polyester fabrics and compilation fabrics, via the production process of coated or knife coated, add a variety of additives, including but not limited to stabilizers, plasticizers, fire retardants, etc., so that the tarpaulin has a very strong tear resistance, tear strength can reach

Durability

The PVC coated fabric is produced by imported equipment, the product structure is advanced, has a solid surface, has a strong resistance to prevent tear, this is one of the biggest features of our products, the quality is very stable, with long life cycle, there is a very excellent

Scratch resistant

The PVC coated fabric is a kind of liquid PVC uniformly coated on top of the base cloth, the upper and lower two surfaces are smooth and strong, and polyester base cloth on the high strength, can prevent sharp objects scratch or puncture, with good scratch resistance.

Wear-resistant

The fabric surface is very smooth, the surface coating is arranged tightly via surface acrylic or PVDF treatment techniques, the hardness is very high, resisting all kinds of wear and tear,

PVC bottom fabric – Factory wholesale



Properties	Units	Test method	640gsm	630gsm	610gsm	650gsm	680gsm
			Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	20*20	20*20	20*20	20*20	9*9
Finished Fabric Weight	Gram/m2	DIN53352	640	630	610	650	680
Base Fabric Weight	Gram/m2	DIN53352	175	180	175	175	88
Thickness – finished product	um	DIN53352	50	51	54	52	50
Break Strength Warp	N/5cm	GB/T1040	2500	2500	2500	2500	1200
Break Strength Weft	N/5cm	GB/T1040	2200	2200	2200	2200	1000
Tear Strength Warp	N/5cm	DIN 53363	310	280	220	280	250
Tear Strength Weft	N/5cm	DIN 53363	280	250	200	250	200
Adhesion	N/5cm	DIN 53357	90	120	120	90	120
Temperature range	°C	DIN 53368	-30~+70°C	-30~+70°C	-30~+70°C	-30~+70°C	-40~+70°C
Fire Retardant		Self-extinguishing	Both sides	Both sides lacquering			

Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com

WEB: www.gstarp.com