

PVC inflatable advertising fabric-Factory wholesale



GSTARP



Environmental material



High tensile strength



waterproof and UV resistant



lightweight and durable



High wear resistance



Wight: 450gsm 500gsm 600gsm 650gsm 680gsm 700gsm 750gsm 850gsm 900gsm 1050gsm

Customization is also

PVC inflatable advertising fabric—Factory wholesale



GSTARP

- **PVC** inflatable advertising is made of high quality environmental protection materials, lightweight and durable, with waterproof and UV resistant performance. Its inflatable design is novel, easy to attract attention, suitable for a variety of outdoor activities and brand promotion. Easy to install, disassemble and reuse, providing an efficient and cost-effective solution for advertising.

1 Weight 450gsm is suitable for making small and medium-sized inflatable advertisements, such as arches, inflatable columns, etc., and has good portability.

2 The weight range of 600–700gms is suitable for making medium to large inflatable advertisements, such as inflatable tents, inflatable models, and inflatable booths, with a certain level of strength and durability.

3 Products weighing over 800gsm are used for inflatable advertising products that are oversized or have been used for a long time, such as inflatable stage backgrounds, giant advertising walls, etc., and have excellent tear resistance and durability.

► The Impact of PVC Inflatable Advertising on Brand Visibility

Innovative Design and Eye-catching Appeal

1 PVC inflatable advertising is large in size, vibrant in color, and uniquely designed, making it highly noticeable at events, exhibitions, malls, and outdoor spaces. Its striking appearance quickly captures the attention of customers.

Strong Brand Impressions

2 The creative shapes and distinctive designs of PVC inflatable advertising, which stand out from traditional advertisements, leave a lasting impression on viewers.

Flexibility and Coverage


3 PVC inflatable advertising is easy to install, disassemble, and transport, making it convenient for quick setup and repeated use. It requires minimal space, allowing for flexible placement and the ability to reach a broader audience.

Cost-Effectiveness

4 Compared to traditional forms of advertising, PVC inflatable advertising has lower production costs, a longer usage lifespan, and the ability to be reused multiple times, offering excellent value for money.



Factory wholesales

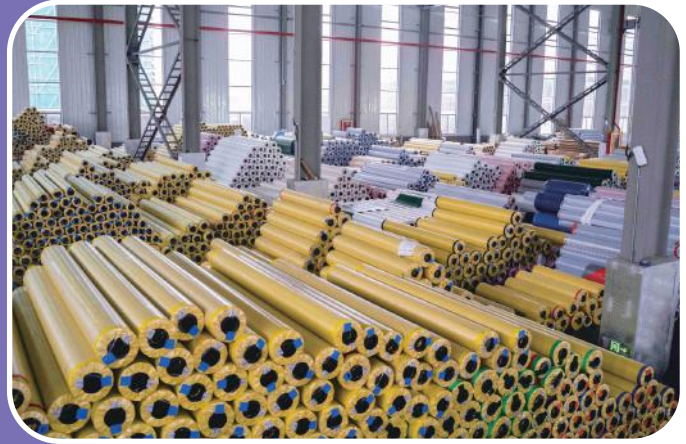



► Innovative Designs in PVC Inflatable Advertising

- 1 PVC inflatable advertising is lightweight, creatively designed, visually impactful, customizable, and has a broad reach. Its designs are continually evolving with constant innovation.
- 2 The recognizability of PVC inflatable advertising is extremely high, with diverse shapes that can be crafted into various complex designs, whether it's product models, brand logos, or movable structures, offering great recognition and appeal. It can also be enhanced with elements like lighting, sound, and touch sensors, providing a deeper immersive experience for customers.
- 3 The material used for PVC inflatable advertising is eco-friendly and recyclable, aligning with modern environmental standards and helping to establish a brand's image as environmentally conscious.

PVC inflatable advertising fabric – Specifications



GSTARP

Properties	Units	Test method	750gsm	850gsm	900gsm	610gsm	650gsm	680gsm
			Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	1000D*1000D	500D*500D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	23*23	18*17	28*26	20*20	20*20	9*9
Finished Fabric Weight	Gram/m2	DIN53352	750	850	900	610	650	680
Base Fabric Weight	Gram/m2	DIN53352	200	75	236	175	175	88
Thickness–finished product	um	DIN53352	60	65	72	54	52	50
Break Strength Warp	N/5cm	GB/T1040	3000	1250	3500	2500	2500	1200
Break Strength Weft	N/5cm	GB/T1040	2800	1150	3300	2200	2200	1000
Tear Strength Warp	N/5cm	DIN 53363	300	150	500	220	280	250
Tear Strength Weft	N/5cm	DIN 53363	270	125	450	200	250	200
Adhesion	N/5cm	DIN 53357	120	100	120	120	90	120
Temperature range	°C	DIN 53368	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-40~+70
Fire Retardant		Self-extinguishing	both sides lacquering		Top side			

Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com