



GSTARP

PVC Knife Coated Tarpaulin Factory wholesale



**PVC tarpaulin manufacturers
factory wholesale**


WEB: www.gstarp.com

Jiaying Green Shield New Materials Co., Ltd

PVC Knife Coated Tarpaulin Factory wholesale



PVC Knife Coated Tarpaulin is the most advanced production process with the most stable quality, the production line length totals more than 200 meters, with a long drying tunnel to ensure uniform product thickness, the strength of the coating bonding makes the life of PVC fabric significantly increased, PVC TARPS width ranges from 0.5–5.1 meters, the weight can be 2800G, the thickness can be 2.2 mm. It can increase the intermediate blockout layer as required by the customer, surface treatment can also be conducted, such as acrylic and PVDF. All types of PVC fabric can be produced.

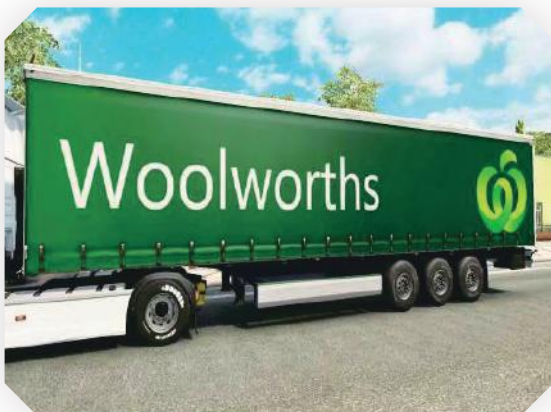

Applications




Customizable

PVC Knife Coated Tarpaulin Factory wholesale



GSTARP

Professional sales team, over 15 years experience in producing PVC Knife Coated Tarpaulin, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpaulin in Haining, The greatest feature of our PVC Knife Coated Tarpaulin is stable and durable quality. You can get the reasonable price with best quality here.

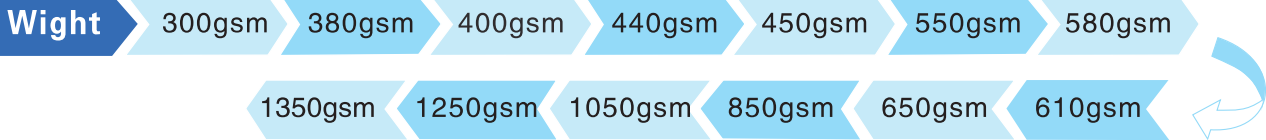

Features of PVC knife-coated waterproof fabric





GSTARP

- ▶ **Durability** The PVC coated fabric is produced by imported equipment, the product structure is advanced, has a solid surface, has a strong resistance to prevent tear, this is one of the biggest features of our products, the quality is very stable, with long life cycle, there is a very excellent durability.
- ▶ **Scratch resistant** The PVC coated fabric is a kind of liquid PVC uniformly coated on top of the base cloth, the upper and lower two surfaces are smooth and strong, and polyester base cloth on the high strength, can prevent sharp objects scratch or puncture, with good scratch resistance.
- ▶ **Wear-resistant** The fabric surface is very smooth, the surface coating is arranged tightly via surface acrylic or PVDF treatment techniques, the hardness is very high, resisting all kinds of wear and tear, so it is very wear-resistant.
- ▶ **Smooth surface** The graphic cloth is made by lamination or coating, and with the special treatment on the surface, the surface is very smooth.
- ▶ **Colors customizable** We can make any colors as customers' samples or Pantone colors number or RAL color number. we have automatic color matching equipment, manually matching the color is not needed, which is our advantages.
- ▶ **Anti-static** fabric is completely anti-static, this is very important for safety, all purchasing German production equipment, anti-static level is 10E7.
- ▶ **Long lifetime** Produced by coating or coating process, the product structure is stable, quality is stable, with strong durability, to ensure economic returns, the product has a very good service life, over 10 years.

PVC Knife-coated waterproof fabric specifications



Properties	Units	Test method	450gsm	500gsm	550gsm	590gsm	610gsm	650gsm	680gsm	750gsm	800gsm	850gsm	900gsm	1050gsm	1100gsm	1250gsm	1350gsm	
			Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*500D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D Low-wick	1000D*1000D	1000D*1000D	500D*500D	1000D*1000D	1000D*1000D	1300D*1300D	1500D*1500D	1500D*1500D	
Base Fabric Density	Thread/inch	DIN53351	18*16	20*20	18*18	9*9	14*14	20*20	20*20	23*23	23*23	18*17	28*26	30*30 Panama	30*30 Panama	30*30 Panama	30*30 Panama	
Finished Fabric Weight	Gram/m2	DIN53352	580	500	550	600	610	650	680	750	800	850	900	1050	1100	1250	1350	
Base Fabric Weight	Gram/m2	DIN53352	95	172	157	50	125	175	175	200	200	75	236	265	320	380	380	
Thickness—finished product	um	DIN53352	54	40	42	1300	52	52	52	60	62	65	72	80	88	100	106	
Break Strength Warp	N/5cm	GB/T1040	1500	2000	2000	25	1800	2500	2500	3000	3000	1250	3500	4200	5500	7000	7000	
Break Strength Weft	N/5cm	GB/T1040	1200	1800	1800	1100	1600	2200	2200	2800	2800	1150	3300	4000	5000	6800	6800	
Tear Strength Warp	N/5cm	DIN 53363	250	250	220	25	200	280	280	300	300	150	500	600	700	1000	1000	
Tear Strength Weft	N/5cm	DIN 53363	200	220	200	300	180	250	250	270	270	125	450	550	700	900	900	
Adhesion	N/5cm	DIN 53357	50	120	120	280	80	90	90	120	120	100	120	120	120	120	120	
Temperature range	℃	DIN 53368	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	A Grade
Fire Retardant		Self-extinguishing							Both sides lacquering	Both sides lacquering	Embossing		Top side	Both sides lacquering	TRIPLE LACQUERING		PVDF(unweldable) /PVDF(weldable)	

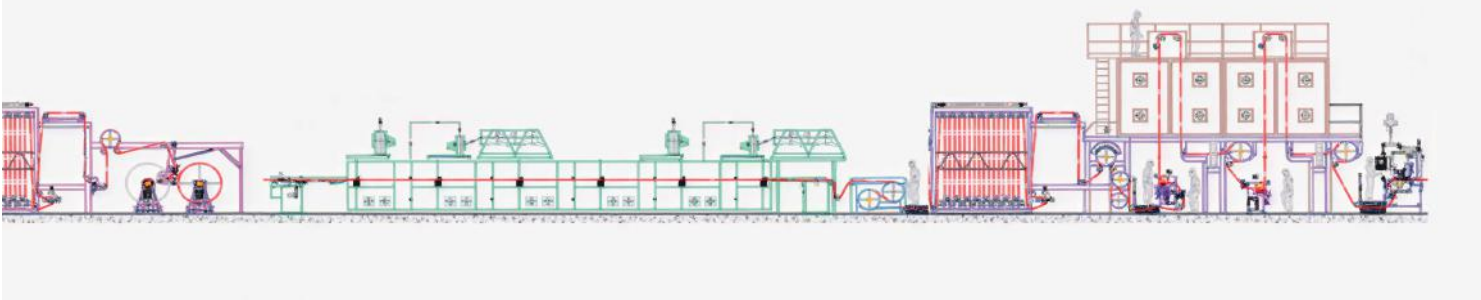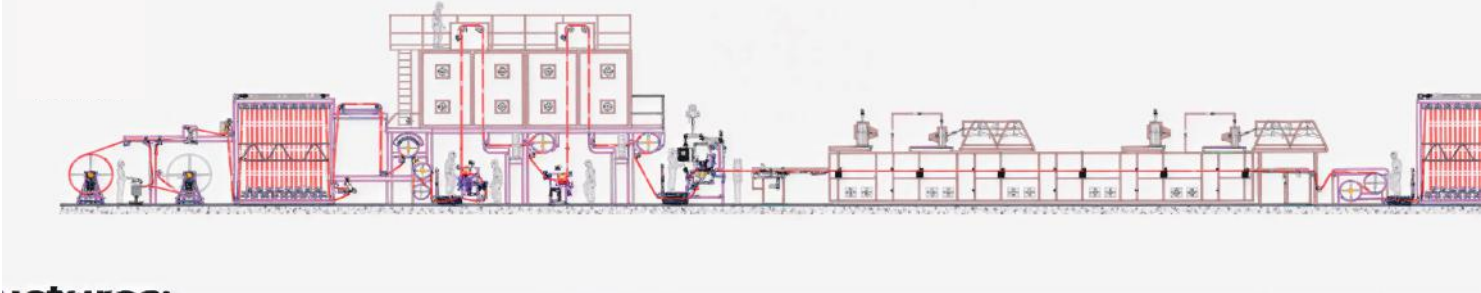

Jiaying Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com