




100%
waterproof.




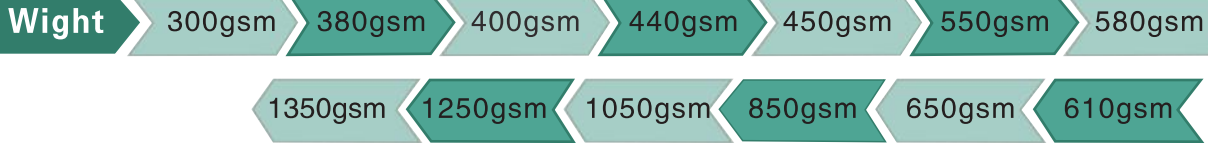

Customization is also possible

Applications

PVC Tarpaulin, PVC Mesh Tarp, PVC Banner Tarpaulin, PVC Truck Tarps, PVC Tent Fabric, PVC Strip Fence, PVC Tarpaulin for Inflatable, Swimming Pool PVC Tarpaulin, Medical Tarp/Healthcare Fabric, PVC Sport Material, PVC Car Wash Mat, PVC Industry Tarpaulin, PVC Bag Fabrics, Embossed Vinyl Fabric, Water containers Fabric, PVC Printed Tarps, PVC Breed Tarpaulin, Agricultural PVC Products, Sound Barrier, Sun Protect&Sunshade, Finish Product OEM,Tpu, PVC membrane structure tensile fabric

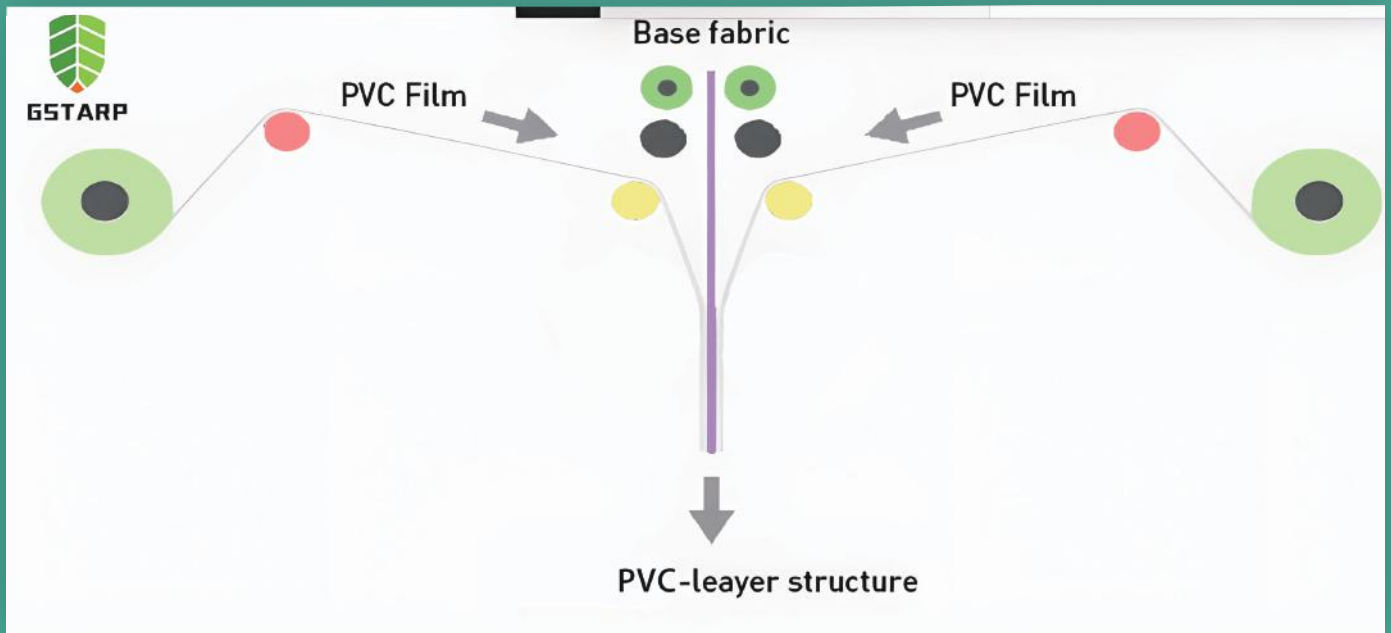

Features

Durable, Long life

Super tear strength

Super Adhesion strength

Super tensile strength



PVC Laminated Tarpaulin is the earliest and most mature production process in this industry, before the production, it needs to prepare the substrate and PVC film. Through the rolling, bonding, and then extrusion, the three layers are closely combined together, it can get the finished product after the surface treatment, with fast production speed and relatively simple process, the products are cheap, mainly used to produce tent fabric and advertising fabric.



Professional sales team, over 15 years experience in producing PVC Laminated Tarpaulin, Over 10 years OEM&ODM finished product experience, we are a factory produces pvc tarpaulin in Haining, The greatest feature of our PVC Laminated Tarpaulin is stable and durable quality.



You can get the reasonable price with best quality here.



PVC Features of PVC coated fabric



GSTARP

Weldable:

Laminated coated fabrics and coating coated fabrics are two layers of PVC film laminated on top of the base cloth in the center, both top and bottom surfaces are PVC layer, so it is very easy to weld, we usually use hot air welding and high frequency welding machine to weld firmly with very good results.

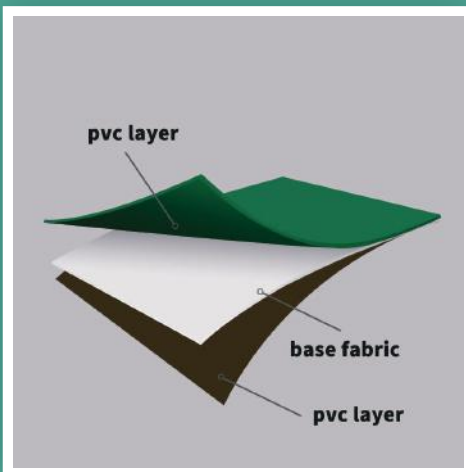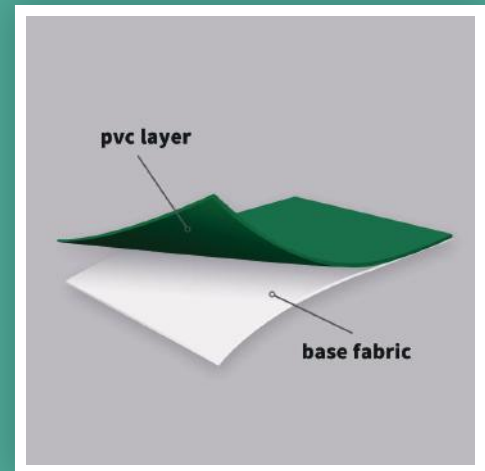


Environmental Protection:

GSTARP follow the EU environmental standards and the U.S.HSF standards, all raw materials and auxiliary materials are strictly in accordance with the requirements of the test, our equipment is very advanced, to ensure that the entire production process is very environmentally friendly, our products are exported to more than 100 countries in the world, very environmentally friendly.

Anti-puncture:

fabric is five layers structure, each layer is high strength laminated price, and the surface is smooth, anti-puncture effect is very good.

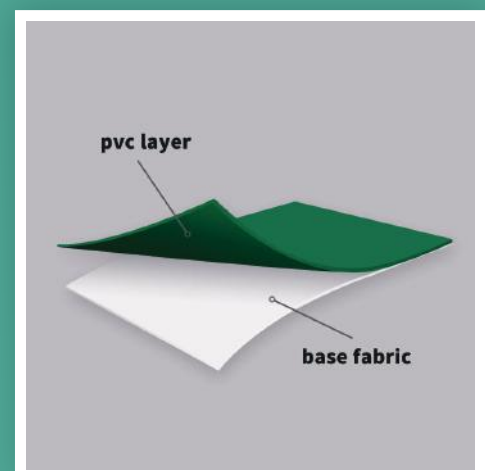

Environmental Adaptability :

We have exported a lot of products to Southeast Asia, Middle East, North America and other regions of the customer, have good reputations, also the product environmental adaptability is very good, its work temperature is from -40-70.


PVC Features of PVC coated fabric



GSTARP

Price Advantage:

We are a manufacturer, as a maker, we have the advanced production line imported from Germany, the products are stable and at the same time have the cost advantage, so the price is very competitive.

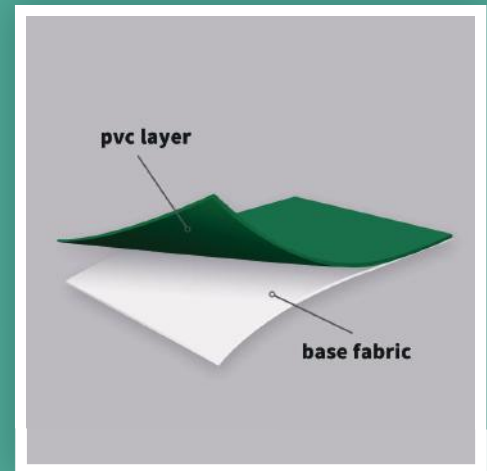

colorful




Fire Prevention



No odor



durability



Super Tensile Strength



Super Tear Strength



Softness and excellent hand feel



Air tightness

Properties	Units	Test method	650gsm	680gsm	750gsm	800gsm	850gsm	900gsm	1050gsm	1100gsm	1250gsm	1350gsm
			Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	1000D*1000D	1000D*1000D Low-wick	1000D*1000D	1000D*1000D	500D*500D	1000D*1000D	1000D*1000D	1300D*1300D	1500D*1500D	1500D*1500D
Base Fabric Density	Thread/inch	DIN53351	20*20	20*20	23*23	23*23	18*17	28*26	30*30 Panama	30*30 Panama	30*30 Panama	30*30 Panama
Finished Fabric Weight	Gram/m ²	DIN53352	650	680	750	800	850	900	1050	1100	1250	1350
Base Fabric Weight	Gram/m ²	DIN53352	175	175	200	200	75	236	265	320	380	380
Thickness-finished product	um	DIN53352	52	52	60	62	65	72	80	88	100	106
Break Strength Warp	N/5cm	GB/T1040	2500	2500	3000	3000	1250	3500	4200	5500	7000	7000
Break Strength Weft	N/5cm	GB/T1040	2200	2200	2800	2800	1150	3300	4000	5000	6800	6800
Tear Strength Warp	N/5cm	DIN 53363	280	280	300	300	150	500	600	700	1000	1000
Tear Strength Weft	N/5cm	DIN 53363	250	250	270	270	125	450	550	700	900	900
Adhesion	N/5cm	DIN 53357	90	90	120	120	100	120	120	120	120	120
Temperature range	°C	DIN 53368	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	A Grade
Fire Retardant		Self-extinguishing		Both sides lacquering	Both sides lacquering	Embossing		Top side	Both sides lacquering	TRIPLE LACQUERING		PVDF(unweldable)/ PVDF(weldable)