


Mainly used for



PVC Tarpaulin for Inflatable is pvc heavy duty fabric, wight form 600gsm to 1500gsm.

PVC Tarpaulin for Inflatable Available Worldwide

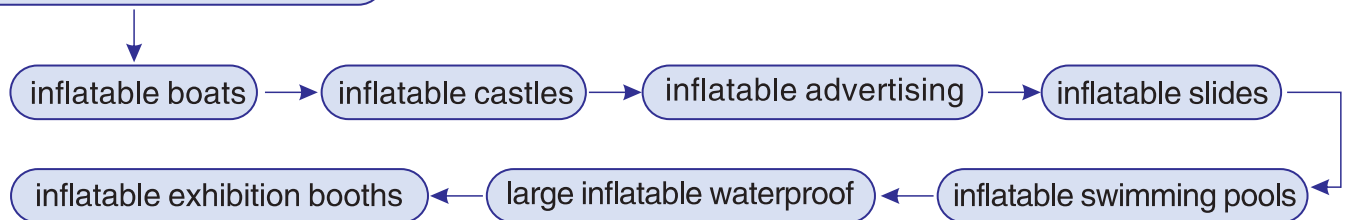

GSTARP

GSTRP is a professional factory produces PVC Tarpaulin for Inflatable with over 15 years of experience. Our products are sold to more than 150 countries around the world. We can produce PVC Tarpaulin for Inflatable with weights ranging from 600 to 1500g, with a maximum width of 3.4 meters. We can produce any color according to RAL, PANTONE, or sample, Width and length can also be made according to customer requirements.



Excellent air tightness



high strength



long life, anti-aging



weather resistance

Professional sales team, Over 10years OEM&ODM finished product experience, Gemeny production lines, Automatic computer colour meching system, Advanced inspection process0, Imported pvc resin, Can deliver what exactly client need.





GSTARP

Features of PVC Tent Tarpaulin

1

Airtightness:

Our coated cloth is equipment imported from Germany, the new advanced process to make the coating and the basic tightly combined, through the oven and tunnel furnace heating and shaping, has a very good airtightness, windproof effect, with good airtightness, it can be used as a large odd storage device.

2

Heat insulation:

The PVC coated fabric is formulated so that the coating is flame retardant, an extra layer of security is added to protect against sub-ultraviolet rays, and has good insulation against heat sources.



3

Durability:

The PVC coated fabric is produced by imported equipment, the product structure is advanced, has a solid surface, has a strong resistance to prevent tear, this is one of the biggest features of our products, the quality is very stable, with long life cycle, there is a very excellent durability.



4

Scratch resistant:

The PVC coated fabric is a kind of liquid PVC uniformly coated on top of the base cloth, the upper and lower two two surfaces are smooth and strong, and polyester base cloth on the high strength, can prevent sharp objects scratch or puncture, with good scratch resistance.

5

Wear-resistant:

The fabric surface is very smooth, the surface coating is arranged tightly via surface acrylic or PVDF treatment techniques, the hardness is very high, resisting all kinds of wear and tear, so it is very wear-resistant.





GSTARP

Features of PVC Tent Tarpaulin

6


Smooth surface :

The graphic cloth is made by lamination or coating, and with the special treatment on the surface, the surface is very smooth.

7

Colors customizable:

We can make any colors as customers's samples or Pantone colors number or RAL color number. we have automatic color matching equipment, manually matching the color is not needed, which is our advantages.





Product specifications

Properties	Units	Test method	450sm	500gsm	550gsm	590sm	650gsm	680gsm	750gsm	800gsm
			Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	500D*500D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D Low-wick	1000D*1000D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	18*16	20*20	18*18	9*9	20*20	20*20	23*23	23*23
Finished Fabric Weight	Gram/m ²	DIN53352	580	500	550	600	650	680	750	800
Base Fabric Weight	Gram/m ²	DIN53352	95	172	157		175	175	200	200
Thickness – finished product	um	DIN53352	54	40	42	1300	52	52	60	62
Break Strength Warp	N/5cm	GB/T1040	1500	2000	2000	25	2500	2500	3000	3000
Break Strength Weft	N/5cm	GB/T1040	1200	1800	1800	1100	2200	2200	2800	2800
Tear Strength Warp	N/5cm	DIN 53363	250	250	220	25	280	280	300	300
Tear Strength Weft	N/5cm	DIN 53363	200	220	200	300	250	250	270	270
Adhesion	N/5cm	DIN 53357	50	120	120	280	90	90	120	120
Temperature range	°C	DIN 53368	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70
Fire Retardant		Self-extinguishing						Both sides lacquering	Both sides lacquering	Embossing



PVC Tarpaulin for Inflatable Available Worldwide



GSTARP



Tarpaulin for Inflatable Available Worldwide

Jiaxing Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com

WEB: www.gstarp.com