



GSTARP



PVC tent fabric Available Worldwide

PVC tent tarpaulin as known pvc tent fabri or pvc tent vinyle or tent material, is a type of pvc coated tarpauin. We recommend laminated or coated tent fabric to our customers according to the application scenario, this material is widely used and loved by people all over the world, we are a professional manufacturer of high quality tent fabrics in a variety of thicknesses and colors, the most important feature of this fabric is that it is very durable and 100% waterproof, it is suitable for all kinds of tents and other outdoor applications. The weight is from 450-1200, the top of the tent is thickened and opaque, the side curtains are relatively thinner, there are transparent windows, also mesh windows can be used for ventilation, our tents are made of German equipment using the process of coating or laminating, with UV-resistant, 100% waterproof, scratch-resistant, flame-retardant, very safe and durable. It can endure hail, strong sunlight, high temperature, humidity and other climates. It can be used for more than 10 years.



PVC tent fabric Available Worldwide



GSTARP

Professional sales team, Over 15years experience in producing pvc tent fabric, Over 10years OEM&ODM finished product experience, Gemeny production lines, Automatic computer colour meching system, Advanced inspection process, Imported pvc resin, Can deliver what exactly client need.




Withstand various weather conditions such as hail, strong sunlight, high temperature, and humidity, with a service life of over 10.




PVC tent fabric Available Worldwide

Tent fabric is made of PVC coated on the base, which is divided into several types of weaving, with the temperature of the production process and the formula to change the tear strength and tensile strength of tent tarp. The grammage of the product is controlled by the thickness of the PVC film, which is automatically controlled by our computer. The production line determines the production formula according to the customer's requirements of flame retardant, UV protection and chemical corrosion. The hardness of the film and the formula will make a different feel of the surface, we can according to the different requirements of customers to do the surface treatment, through the lamination or coated technology, acrylic or polished. The surface can be made into matte, embossed, glossy and so on.

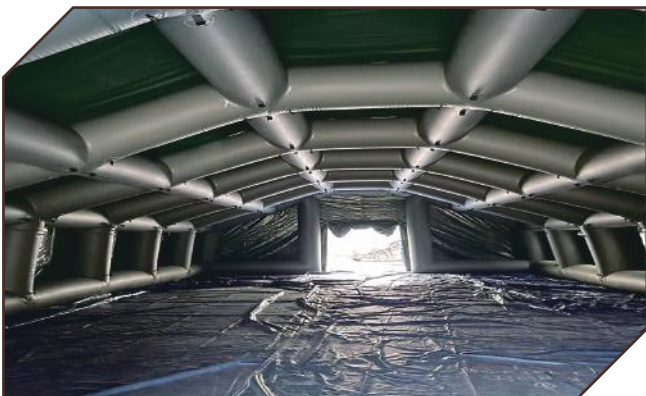

GSTARP

colorful

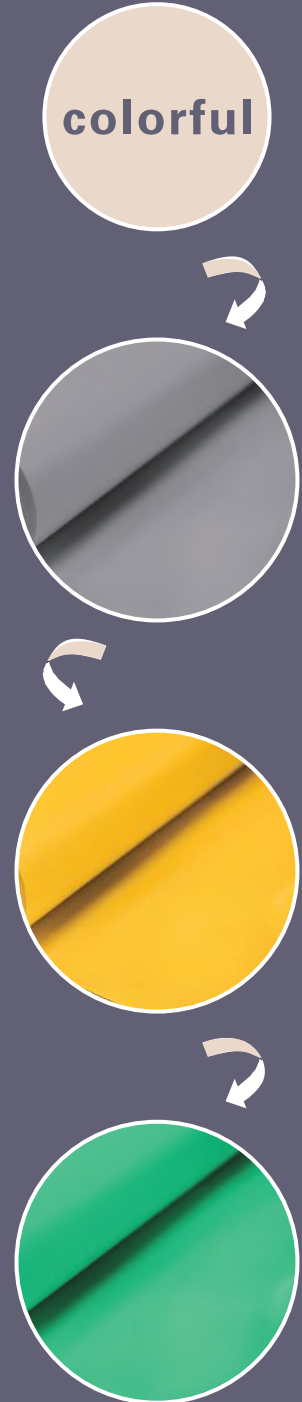

Service life exceeds 10 years

PVC tent fabric Available Worldwide



Properties	Units	Test method	380gsm	410gsm	450gsm	500gsm	550gsm	590gsm	610gsm	650gsm	680gsm	750gsm	800gsm	850gsm	900gsm
			Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value	Average value
Base Thread Density	Denier	DIN53350	840D*840D	1000D*1000D	500D*500D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D	1000D*1000D Low-wick	1000D*1000D	1000D*1000D	500D*500D	1000D*1000D
Base Fabric Density	Thread/inch	DIN53351	18*18	18*18	18*16	20*20	18*18	9*9	14*14	20*20	20*20	23*23	23*23	18*17	28*26
Finished Fabric Weight	Gram/m2	DIN53352	380	400	580	500	550	600	610	650	680	750	800	850	900
Base Fabric Weight	Gram/m2	DIN53352	150	154	95	172	157		125	175	175	200	200	75	236
Thickness—finished product	um	DIN53352	52	31	54	40	42	1300	52	52	52	60	62	65	72
Break Strength Warp	N/5cm	GB/T1040	1850	2500	1500	2000	2000	25	1800	2500	2500	3000	3000	1250	3500
Break Strength Weft	N/5cm	GB/T1040	1600	2000	1200	1800	1800	1100	1600	2200	2200	2800	2800	1150	3300
Tear Strength Warp	N/5cm	DIN 53363	220	250	250	250	220	25	200	280	280	300	300	150	500
Tear Strength Weft	N/5cm	DIN 53363	180	220	200	220	200	300	180	250	250	270	270	125	450
Adhesion	N/5cm	DIN 53357	100	100	50	120	120	280	80	90	90	120	120	100	120
Temperature range	°C	DIN 53368	-30~+70	-40~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70	-30~+70
Fire Retardant		Self-extinguishing									Both sides lacquering	Both sides lacquering	Embossing		Top side



GSTARP



PVC Characteristics of tent fabric

▶ Weldable

Laminated coated fabrics and coating coated fabrics are two layers of PVC film laminated on top of the base cloth in the center, both top and bottom surfaces are PVC layer, so it is very easy to weld, we usually use hot air welding and high frequency welding machine to weld firmly with very good results.

▶ Environmental Protection

GSTARP follow the EU environmental standards and the U.S. HSF standards, all raw materials and auxiliary materials are strictly in accordance with the requirements of the test, our equipment is very advanced, to ensure that the entire production process is very environmentally friendly, our products are exported to more than 100 countries in the world, very environmentally friendly.

▶ Anti-puncture

fabric is five layers structure, each layer is high strength laminated price, and the surface is smooth, anti-puncture effect is very good.

▶ Environmental Adaptability

We have exported a lot of products to Southeast Asia, Middle East, North America and other regions of the customer, have good reputations, also the product environmental adaptability is very good, its work temperature is from -40-70.

▶ Price Advantage

We are a manufacturer, as a maker, we have the advanced production line imported from Germany, the products are stable and at the same time have the cost advantage, so the price is very competitive.

Jiaying Green Shield New Materials Co., Ltd

Mobile: 0086 13625863196

WhatsApp: 0086 13625863196

Add : No.365 West Qianjiang Road, Haining, Zhejiang, China

e-mail : bill@gstarp.com